
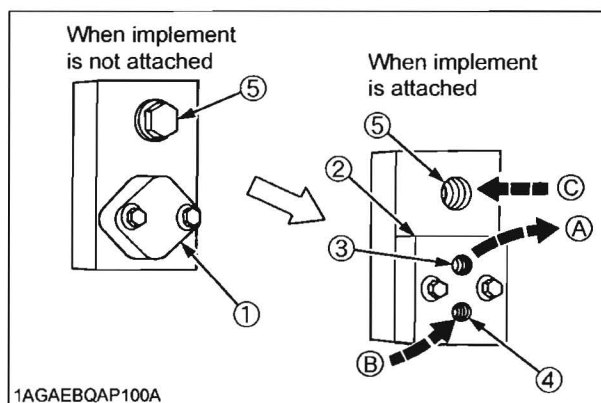


# [Rear outlet]

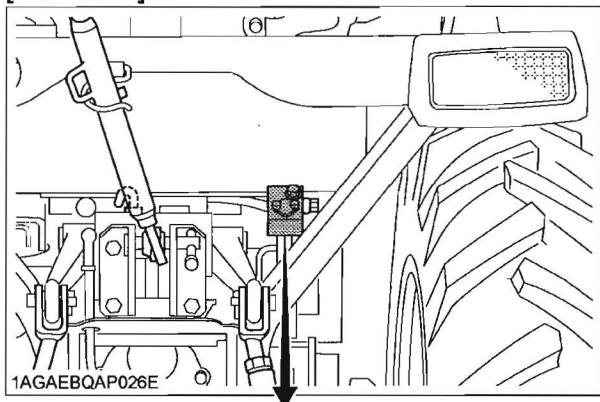

- |                                 |                                   |
|---------------------------------|-----------------------------------|
| (1) Block cover                 | (A) To implement inlet (inlet)    |
| (2) Block outlet cover (option) | Max. flow                         |
| (3) Outlet                      | [B1850, B2230, B2530] :           |
| (4) Inlet                       | 20.5 L/min                        |
| (5) Drain plug                  | [B3030] : 19.7 L/min              |
|                                 | Max. pressure                     |
|                                 | 15.2 to 15.9 MPa                  |
|                                 | (155 to 162 kgf/cm <sup>2</sup> ) |
|                                 | (B) from implement (outlet)       |
|                                 | (C) from implement (Drain)        |

## NOTE :

- If the control valve of implement has the relief valve, the tank port flow from implement should be connected to the port © .