



- (1) Speedometer  
(2) Traveling speed unit

1. Peel the tape off the wire harness in the hood as shown in the figure below, and take out the terminals.

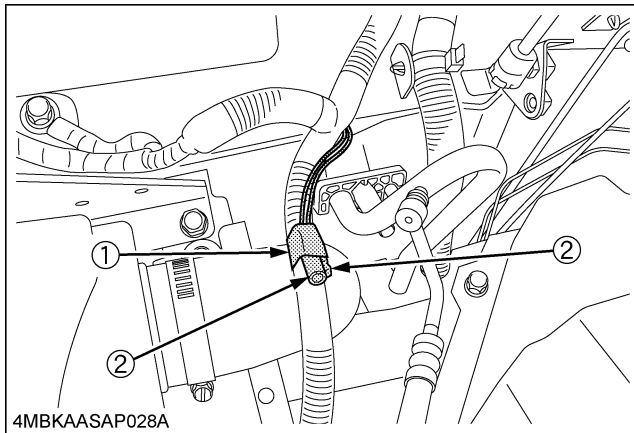

- (1) Tape  
(2) Terminal

2. Interconnect the male and female terminals.

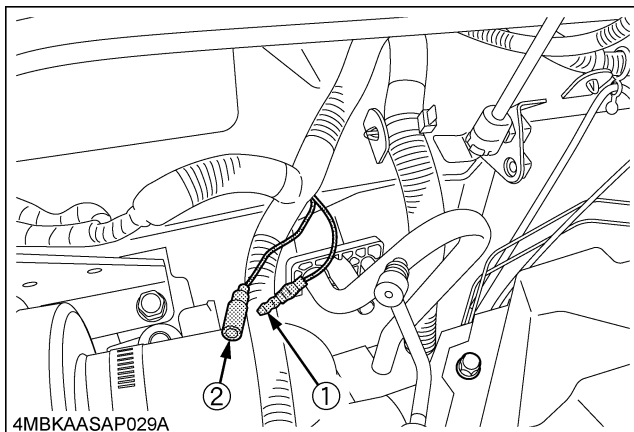

- (1) Male terminal  
(2) Female terminal

## TIRE INFLATION PRESSURE

Check the tire inflation pressure as shown in the table.

Inflation Pressure	140 kPa (1.4 kgf/cm <sup>2</sup> , 20 psi)
--------------------	---

## ESTIMATED ASSEMBLY TIME

Refer to the following table for the estimated assembly time to assemble the vehicle.

RTV-X1100C	0.02 Hr
------------	---------

Assembly time on the table are just reference under the average conditions with following assumption.

1. Assembly by one worker.
2. Following tools and equipment are prepared.
  - (1) Chain hoist or Crane
  - (2) Impact wrench
  - Ratchet wrench
  - Torque wrench
  - Socket wrench
  - and other required tools.